


Product Overview



| | |
|--------------------------|---|
| Thread | Metric (M), PG, NPT |
| Material | UL Approved Nylon PA66, Flammability UL94V-2 for A, C, E Parts. Accept to make Flammability) UL94V-0 EPDM rubber for B, D Parts, Also accept to make super rubber : resist high temperature rubber, resist strong acid/alkali, etc. |
| Temperature | -40°C to 100°C, Short Time 120°C |
| Protection Degree | IP68 |
| Features | The claws and seals of excellent design, sealing nut have a "Click" sound and re-open, can hold cable firmly a wider cable range. Used to close to prevent dust or water against unused holes. and equipment having close threads. |
| Colours | Black (RAL9005) / White Gray (RAL7035) |

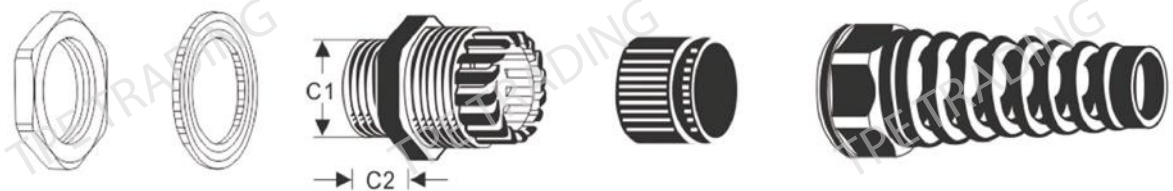

| Thread Type | Product Model | Cable Range | Thread (O.D.) (C1) | Thread Length (C2) | Spanner Size | Qty / Bag |
|-------------|---------------|-------------|--------------------|--------------------|--------------|-----------|
| PG | TPE-PGS7 | 3-6.5 | 12.5 | 8.0 | 16.0 | 100 |
| | TPE-PGS9 | 4-8 | 15.2 | 8.0 | 19.0 | 100 |
| | TPE-PGS11 | 5-10 | 18.6 | 8.0 | 22.0 | 100 |
| | TPE-PGS13.5 | 6-11 | 20.4 | 9.0 | 24.0 | 100 |
| | TPE-PGS16 | 10-13 | 22.5 | 10.0 | 27.0 | 50 |
| | TPE-PGS21 | 13-18 | 28.3 | 10.0 | 33.0 | 50 |

| Thread Type | Product Model | Cable Range | Thread (O.D.) (C1) | Thread Length (C2) | Spanner Size | Qty / Bag |
|-------------|---------------|-------------|--------------------|--------------------|--------------|-----------|
| M | TPE-MS12x1.5 | 3-6.5 | 12.0 | 8.0 | 16.0 | 100 |
| | TPE-MS16x1.5 | 4-8 | 16.0 | 9.0 | 19.0 | 100 |
| | TPE-MS18x1.5 | 5-10 | 20.0 | 10.0 | 22.0 | 100 |
| | TPE-MS20x1.5 | 6-12 | 22.0 | 10.0 | 24.0 | 100 |
| | TPE-MS22x1.5 | 10-14 | 24.0 | 12.0 | 27.0 | 100 |
| | TPE-MS25x1.5 | 13-18 | 25.0 | 15.0 | 33.0 | 50 |
| | TPE-MS27x1.5 | 13-18 | 27.0 | 15.0 | 33.0 | 50 |